

Ter

60W	>6600 Lm
120W	>13200 Lm
200W	>22000 Lm
240W	>26400 Lm
400W	>44000 Lm



Scope of application

Industrial / Halls / Warehouses

Description

Ter is an industrial linear LED lighting device providing an effective alternative to conventional industrial lighting.

It provides a lighting of quality, adjustable and very efficient.

High-temperature transparent resistant glass.

Advantages

Reduced energy consumption by up to 80% compared to conventional light sources.

Sleek quality look.

Fitting

Fitting made of die cast and finished pure aluminium.

Impact, moisture and dust resistant.

Optics

Polycarbonate or glass diffuser with clear lenses.

General Information

Mounting type: Suspended, Surface-mounted, Flush-mounted

LED type: SMD

Voltage: 100-240 VAC / 50-60 Hz

Operating temperature: -25 / +60

UGR: <19

CRI: >80

PF: >0.95

Angle: 135



IP65 IK08


Technical data

Code	Power ^[W]	Luminosity ^[Lm]	Efficiency ^[Lm / W]	Colour Temp. ^[K]	Dimensions ^[mm]	Weight ^[kg]
TR60WW/NW/W-S/BK	60	>6600	>110	4000K/5700K/6500K	330x178x110	3.9
TR120WW/NW/W-S/BK	120	>13200	>110	4000K/5700K/6500K	644x178x110	3.9
TR200WW/NW/W-S/BK	200	>22000	>110	4000K/5700K/6500K	965x178x110	6.7
TR240WW/NW/W-S/BK	240	>26400	>110	4000K/5700K/6500K	965x178x110	6.7
TR400WW/NW/W-S/BK	400	>44000	>110	4000K/5700K/6500K	965x178x110	6.7

Accessories

Product code	Suspension system	Application system	Embedding clips	Emergency kit	0-10V Dim. driver	DALI Driver	Sensor
TR-60 / TR-120	✓	✓		External	0-10	NA	External
TR-200 / TR-240 / TR-400	✓	✓		External	0-10	✓	External

Photometric diagrams

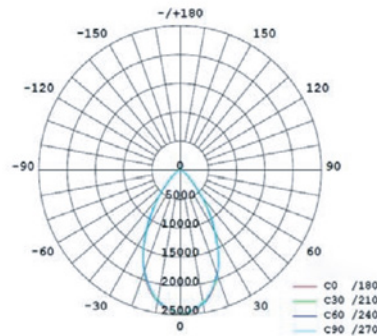

Packaging info

Power ^[W]	Packing	Dimensions ^[mm]	Net	Outer Carton Size ^[mm]	Outer Box G.W.
60 W	1 pc /carton, without inner box	330 x 178 x 110	3.1	375 x 220 x 165	3.9
120 W	1 pc /carton, without inner box	644 x 178 x 110	3.9	690 x 220 x 165	4.8
200 W	1 pc /carton, without inner box	965 x 178 x 110	6.7	1010 x 220 x 165	7.7
240 W	1 pc /carton, without inner box	965 x 178 x 110	6.7	1010 x 220 x 165	7.7
400 W	1 pc /carton, without inner box	965 x 178 x 110	6.7	1010 x 220 x 165	7.7